




# Assembly Instructions

ITEM NO: 31182

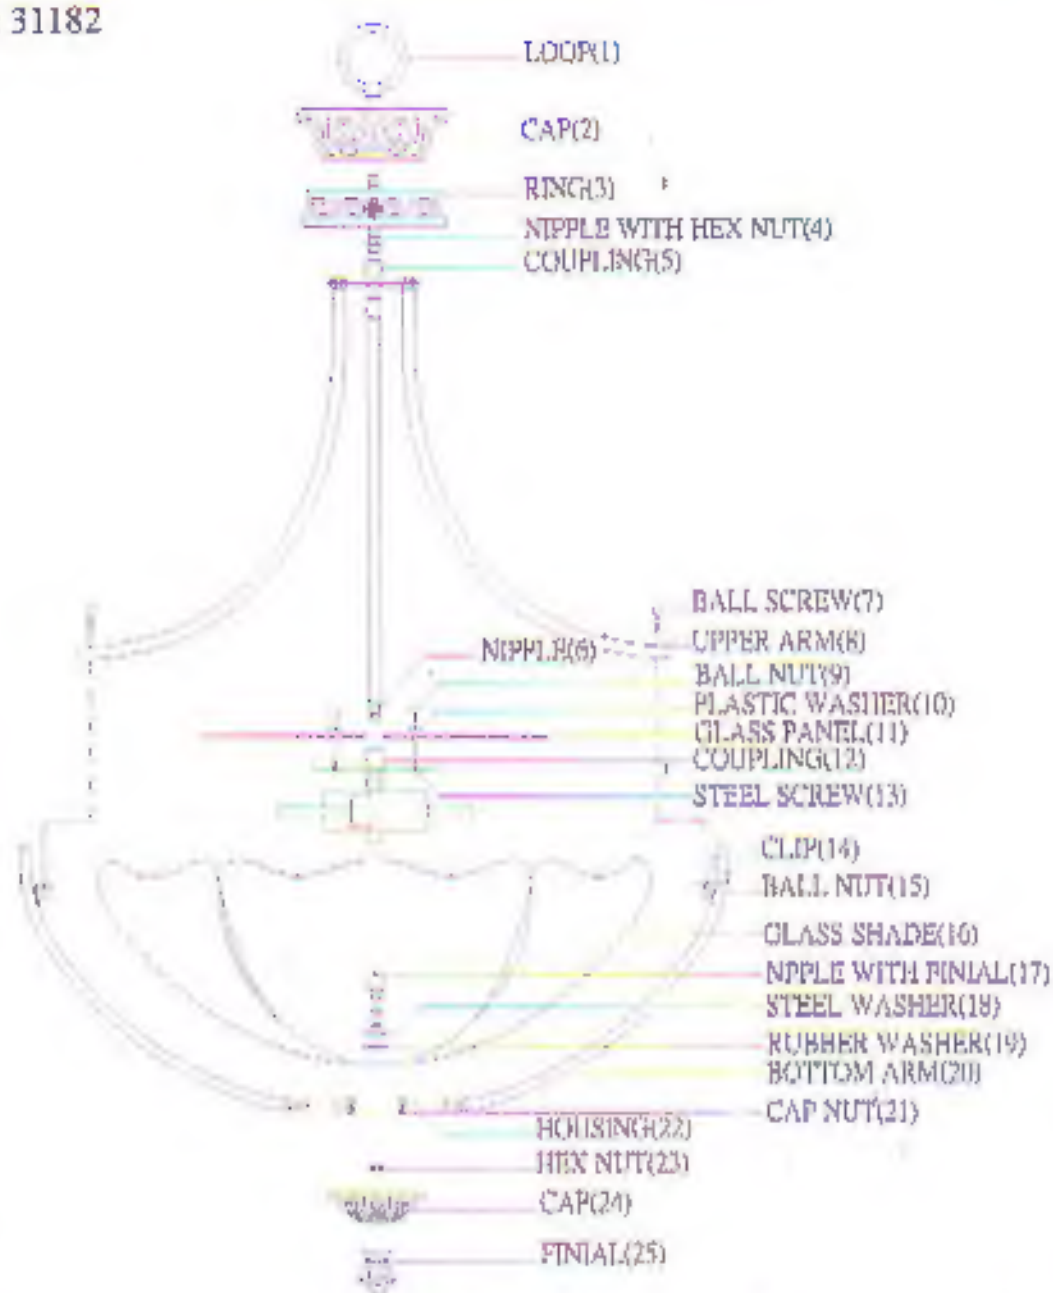

1. Carefully remove the fixture out of the carton, and check that all the parts are included referring to the above illustration. Make sure not to misplace any parts that are needed for the installation;
2. Thread nipple(6) into coupling(12), then thread nipple with hex nut(4) into coupling(5), then slide the ring(3) and cap(2) onto nipple with hex nut(4), and secure them with loop(1);
3. Install the bottom arm(20) through hole of the housing(22) using cap nut(21) on the first, then install the nipple with finial(17) through steel washer(18) and rubber washer(19), glass shade(16), housing(22), and secure them with hex nut(23), then slide the cap(25) onto nipple with finial(17), and tight it with finial(25);
4. Thread ball screw(7) through upper arm(8) and hole of the clip(14) using ball nut(15) on, stop until tight;
5. Slide the glass panel(11) and plastic washer(10) onto steel screw(13), and secure them with ball nut(9);
6. The fixture is assembled!